



### 45555 GLOBAL GB24-3(12V21Ah)

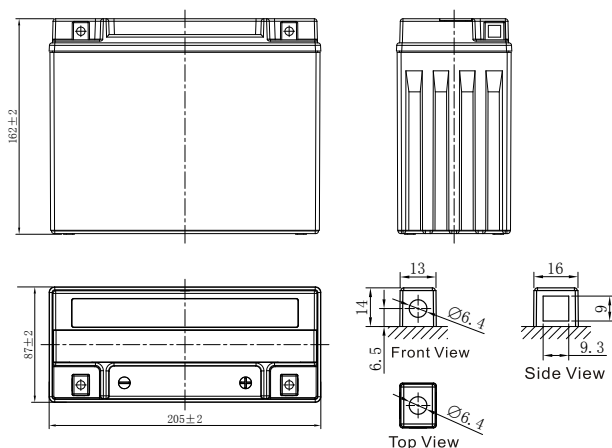

#### Specifications

|                                            |                                                                                                 |                              |
|--------------------------------------------|-------------------------------------------------------------------------------------------------|------------------------------|
| Nominal Voltage                            |                                                                                                 | 12V                          |
| Nominal Capacity (10HR)                    |                                                                                                 | 21Ah                         |
| Cold Cranking Performance Amps@0°F (-18°C) |                                                                                                 | 330A                         |
| Dimension<br>(±2mm)                        | Length                                                                                          | 205mm                        |
|                                            | Width                                                                                           | 87mm                         |
|                                            | Container Height                                                                                | 162mm                        |
|                                            | Total Height                                                                                    | 162mm                        |
| Battery (with acid)                        | Approx Weight                                                                                   | 7.00kg                       |
| Terminal type                              |                                                                                                 | A                            |
| Battery type                               | Factory Activated Series                                                                        |                              |
| Full Charge                                | Constant-Voltage Charge:                                                                        |                              |
|                                            | Initial charging current                                                                        | Less than 0.3C <sub>10</sub> |
|                                            | Voltage                                                                                         | 14.40V~15.00V at 25°C        |
|                                            | Charging time                                                                                   | 15~18h                       |
|                                            | Constant-Current Charge:                                                                        |                              |
|                                            | Charging current 0.1C <sub>10</sub> , when charging voltage up to 14.40V, continue to charge 4h |                              |
| Floating Charge                            | Initial charging current                                                                        | Unlimited                    |
|                                            | Voltage                                                                                         | 13.50V~13.80V at 25°C        |
| Capacity affected<br>by Temperature        | 40°C                                                                                            | 106%                         |
|                                            | 25°C                                                                                            | 100%                         |
|                                            | 0°C                                                                                             | 86%                          |
|                                            | -15°C                                                                                           | 65%                          |

#### Discharge Characteristics (25°C)

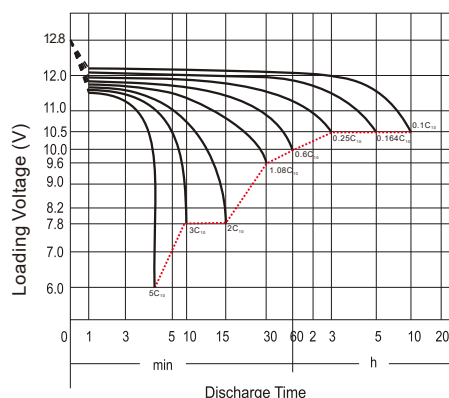

#### General Features

- Maintenance-free
- Sealed and non-spillable AGM battery
- Shipped pre-charged and ready to install

\*Values are subject to variation of +/- 5% in normal manufacturing processes.